




Ideal for leveling, finish grading and backfilling at building sites, feedlots and outdoor arenas.

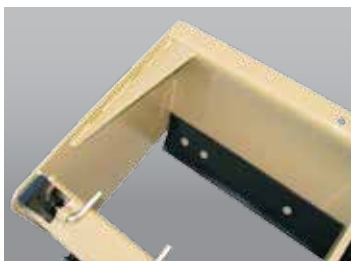

Side panel gussets reinforce the structural integrity during extreme conditions.

BB15 Series

17-40 HP

**BB1548, BB1554, BB1560,
BB1566, BB1572**

Cat. 1

Working Width (cm)	48" (122), 54" (137), 60" (152), 66" (168), 72" (183)
Height of Moldboard	17"
Side Panel Material	5/16"
Depth of Bucket	22"
Overall Depth	31-1/2"
Overall Height	35"
Weight - lb (kg)	382 (173), 402 (182), 428 (194), 461 (209), 504 (229)
Number of Shanks	4, 4, 4, 5, 6
A-Frame Material	1/2" x 2-1/2" Flat Bar
Cutting edges	2, Heat treated and reversible

Color Options:



BB25 Series

25-55 HP

**BB2560, BB2566, BB2572,
BB2584, BB2596**

Cat. 1

Working Width (cm)	60" (152), 66" (167), 72" (182), 84" (213), 96" (244)
Height of Moldboard	17"
Side Panel Material	3/8"
Depth of Bucket	22"
Overall Depth	31-1/2"
Overall Height	35"
Weight - lb (kg)	471 (214), 500 (227), 549 (249), 593 (269), 658 (298)
Number of Shanks	5, 5, 7, 7, 8
A-Frame Material	3/8" Plate

Color Options:

