

## Overseeders




### OS1548 & OS1572 Series

	OS1548		OS1572	
Overall Width	Gauge wheel drive: 77 3/4" Rear roller drive: 60 1/8"		Gauge wheel drive: 99" Rear roller drive: 81 1/4"	
Seeding Width	51"		72"	
Box Length	48"		72"	
Empty Weight	2" Spacing, Wheel Drive: 1290 lbs. 2" Spacing, Roller Drive: 1250 lbs. 3" Spacing, Roller Drive: 1220 lbs.		2" Spacing, Wheel Drive: 1645 lbs. 2" Spacing, Roller Drive: 1605 lbs. 3" Spacing, Roller Drive: 1565 lbs.	
Maximum Horse Power	60			
Driveline	540 rpm; Heavy duty construction with slip clutch protection and fully shielded			
Gearbox	540 rpm input; Constructed of cast iron housing w/steel gears.			
Gearbox Oil	Gear Lube 80-90W EP			
Roller Chain, (Knife Drive)	#80 Roller Chain; adjustable		#100 Roller Chain; adjustable	
Chaincase, (Knife Drive)	Fully enclosed oil bath style chain box with drain plug and vent plug.			
Chaincase Oil	Shell Alvania EP00			
Rotor Diameter	18"			
Rotor Speed	400 RPM			
Knife Tip Speed	2000 FPM			
Knife Depth	0"-1 1/2"			
Knife Spacing	2" or 3"			
Number of Knives - 5 per flange	115 knives on 2" spacing 80 knives on 3" spacing		170 knives on 2" spacing 115 knives on 3" spacing	
Knife Construction	Straight knives: 3/16" thick high carbon, heat treated steel. Curved knives: 5/32" thick high carbon, heat treated steel.			
Seed Box Construction	Water tight box with wind guarded seed splash lid.			
Seed Box Capacity	4 bushels with paddle agitator		6 Bushels with paddle agitator	
Productive (3 1/2 mph)	1.5 acres/hr. (broadcast)		2 acres/hr. (broadcast)	
Number of Seed Cups	7		10	
Seed Cup Metering Construction	Powder metal flutes with individual clean-out handles.			
Seed Cup Drive	Gauge Wheel Drive: Right hand driven with adjustable spring loaded down float. Rear Roller Drive: Rear roller driven to eliminate gauge wheels.			
Seed Cup Agitation	Chain driven paddle type agitators above seed cups.			
Seed Settings	Wide range of calibration settings per acre and per 1000 sq. ft.			
Gauge Wheel Tires	18 x 8.50 x 8 turf tires at 20 psi			
Number of Packer Wheels	22		31	
Packer Wheel Construction	Notched 12" dia. cast iron rollers with corrugated scraper.			
Hitch	Category I: with 10" offset		Category I: Centered	
	Fits Land Pride Quick-Hitch.			
Optional Add-on Equipment				
Small Seeds Box	One-Half Bushel capacity (.64 bu) with: <ul style="list-style-type: none"><li>● Gauge Wheel drive Seed Cups</li><li>● Rear Roller Drive Seed Cups</li></ul>		One Bushel capacity (.96 bu) with: <ul style="list-style-type: none"><li>● Gauge Wheel drive Seed Cups</li><li>● Rear Roller Drive Seed Cups</li></ul>	
Slit Seeder Attachment	2" or 3" Spacing; Directs seed into the slits cut by the knives.			
Tines	Double Torsion, height and angle adjustable; Individual replacement.			
Front Roller	Full width, anti-scalping, depth control, with floating top link.			

Designs, specifications, features and information are subject to change without notice.

# Specifications & Capacities

## Overseeders

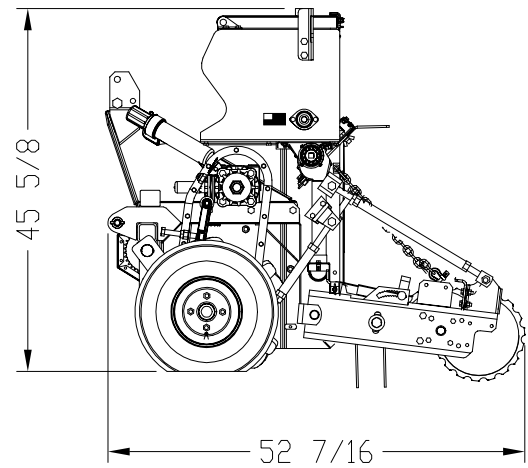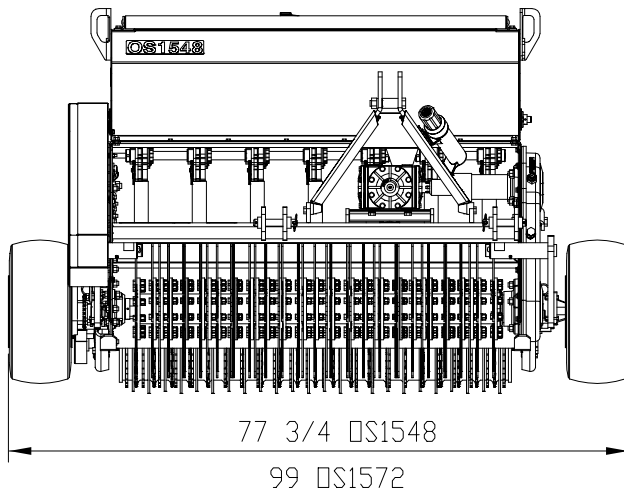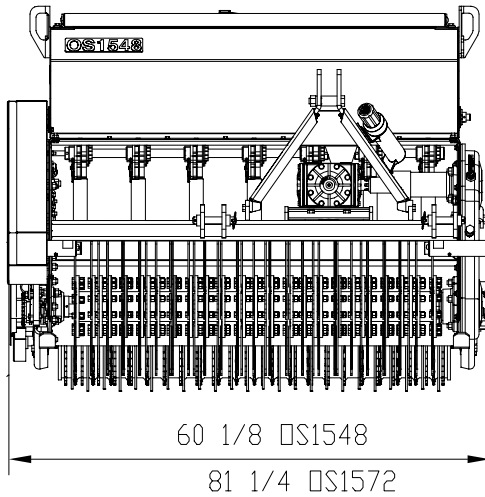

26728

Designs, specifications, features and information are subject to change without notice.