



## Blades, Rear

RBT35 Series		
	RBT3584	RBT3596
Blade Width	84"	96"
Approximate Weight (lbs.) with manual links	709 lbs.	745 lbs.
Maximum Tractor Horsepower	80 HP for 2 Wheel Drive and 65 HP for 4 Wheel Drive	
Maximum G.V.W. (lbs.)	9500 lbs.	
Hitch Type	Cat. 1 & 2 Fits Land Pride Quick-Hitch	
Blade Angle Manual Linkage: Hydraulic Cylinder:	With blade facing forward or reversed Up to 40° in 10° increments clockwise and counterclockwise Up to 50 degrees clockwise and counterclockwise	
Angle Cylinder	3 1/2" X 14" X 1 1/4"	
Blade OffsetManual Linkage Hydraulic Cylinder	Up to 30 inches left and right in 9 positions (Center, 4 left and 4 right) Up to 30 inches left and right	
Offset Cylinder	3 1/2" X 14" X 1 1/4"	
Blade TiltManual Ratchet Jack Hydraulic Cylinder	Maximum 20° up and 20° down with blade facing forward or reversed Maximum 20° up and 20° down with blade facing forward or reversed	
Tilt Cylinder	2" X 6" X 1 1/4"	
Moldboard King Pin	3" diameter	
Moldboard Height	17" tall	
Moldboard Thickness	5/16" reinforced, 3/16" tapered reinforcement channel	
Cutting Edge	1/2" x 6" Heat treated, Replaceable & Reversible (Double bevel)	
Main Frame Construction	Fully Welded Tubular Construction	
Parking Stand	Retractable	
Accessories	Manual or Hydraulic Single Gauge Wheel Skid Shoes, End Plates, Hydraulic Selector Valve and Cushion Valve	

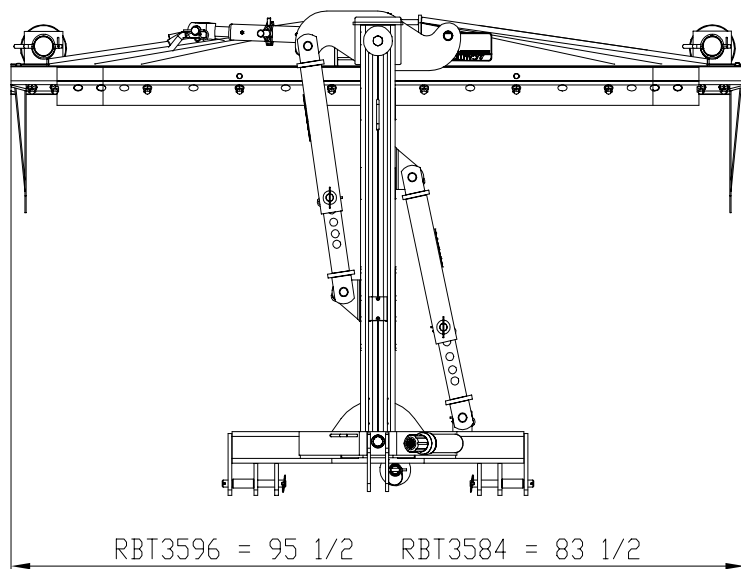

**Top View**

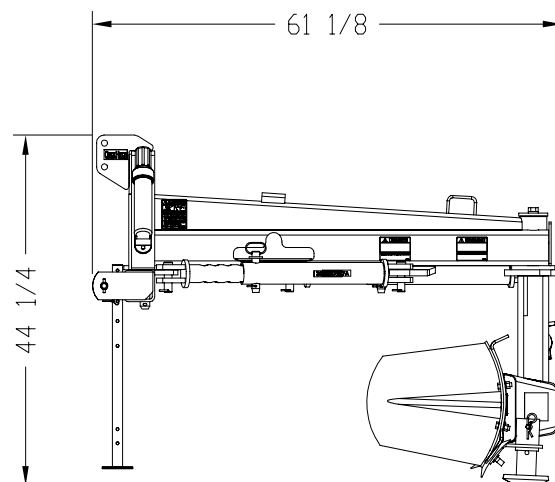

26808

**Side View**

*Designs, specifications, features and information are subject to change without notice.*