


Rotary Cutters, Folding Deck


RC5020 and RCM5020 Series	
Min. PTO Horse Power	70
Gear Box Horsepower	250 HP Splitter 210 HP Center & wing
Gear Box Lubrication & Capacity	Center deck & wings: 10 pints of Gear Lube 80-90W EP Divider Gearbox: 5.5 pints of Gear Lube 80-90W EP
Cutting Capacity	Up To 3" Material
Machine Weight	6,528 lbs. Approx. (With single row chain guards, 6 laminated tires, dual axle, 540 CV main driveline)
Blade Tip Speed @ 540 RPM @ 1000 RPM	Center blade: 17,377 FPM & Wing blade: 17,329 FPM Center blade: 18,165 FPM & Wing blade: 18,317 FPM
Hitch Weight	2300 lbs.
Hitch Types	Pull-Type, Self-Leveling Hitch & Clevis
Hitch Jack	Standard hand crank
Cutting Width Overall Width Minimum Transport Width	20'-0" 20'-9 1/2" 8'-9"
Overall Length	19'-3"
Deck Height	10 1/2"
Cutting Height	2" to 14" High with hydraulic cylinder and stroke control spacers
Lift Hydraulics	4" x 8" hydraulic cylinder, hoses, fittings & stroke control spacers
Wing Hydraulics	3" x 12" hydraulic cylinders, hoses & fittings
Wing Transport Protection	Wing Transport Locks
Deck Thickness	3/16"
Side Skirt Thickness	1/4"
Skid Shoes Wing Deck Center Deck	Reversible & replaceable 2 - Replaceable
Blades - 6 (2 per Carrier)	1/2" x 4" Thru-harden free swinging alloy steel with uplift
Blade Overlap	6"
Blade Bolt	Keyed with hardened flat washer & lock nut
Stump Jumper / Blade Holder	3/16" Round dish shaped bolt-on stump-jumper with 1" diamond shaped blade bar
Deck Ring	Optional 1/2" x 3" fully welded
Front & Rear Guards	Optional rubber, single chain or double chain
Heavy Duty Input Driveline Options	Conventional u-joint ASAE Category 5 with 1 3/8"-21 spline Constant velocity u-joint ASAE Category 5 with 1 3/8"-21 spline or 1 3/4"-20 spline
Heavy Duty Intermediate & Wing Drivelines	ASAE Cat. 5 with slip-clutch protection
Wheel Options	6" x 21" Laminated tires or 27" x 7.75" x 15" Used aircraft tires w/wo foam filling or 15" Rims
Number of Wheel	6 - Wheel option: 4 on transport axle and one on each wing axle 8 - Wheel option: 4 on transport axle and two on each wing axle.
Transport Axle	Spring-cushioned on center transport axle
Hubs	Cast iron 5-bolt hubs with tapered roller bearings and with 1 3/4" shafts
Shredder Blades (optional)	Cuts material into smaller pieces
Colors	Standard color: Beige Optional colors: Green or Red

Designs, specifications, features and information are subject to change without notice.



Rotary Cutters, Folding Deck- RC5020 & RCM5020

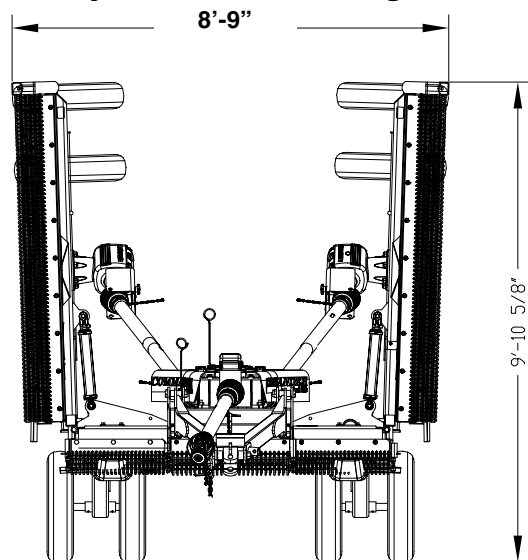

**Transport Width With Wing Axes Disconnected
At The Turnbuckles And Wheels Folded Back**

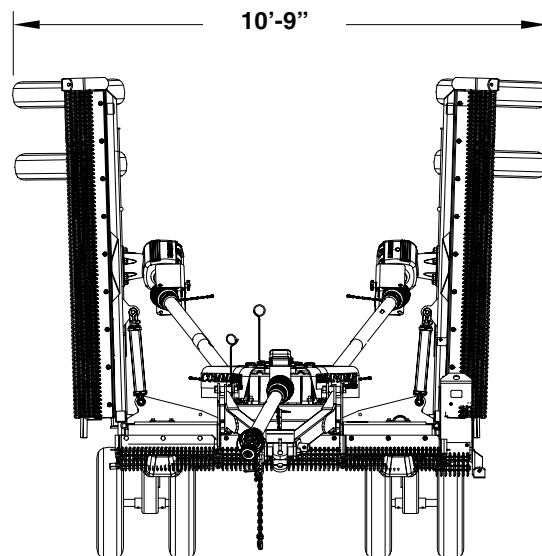

**Transport Width
Without Special Adjustments**

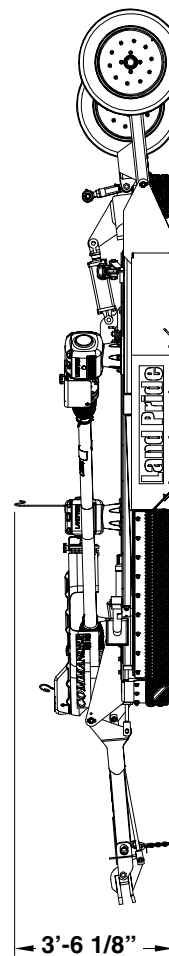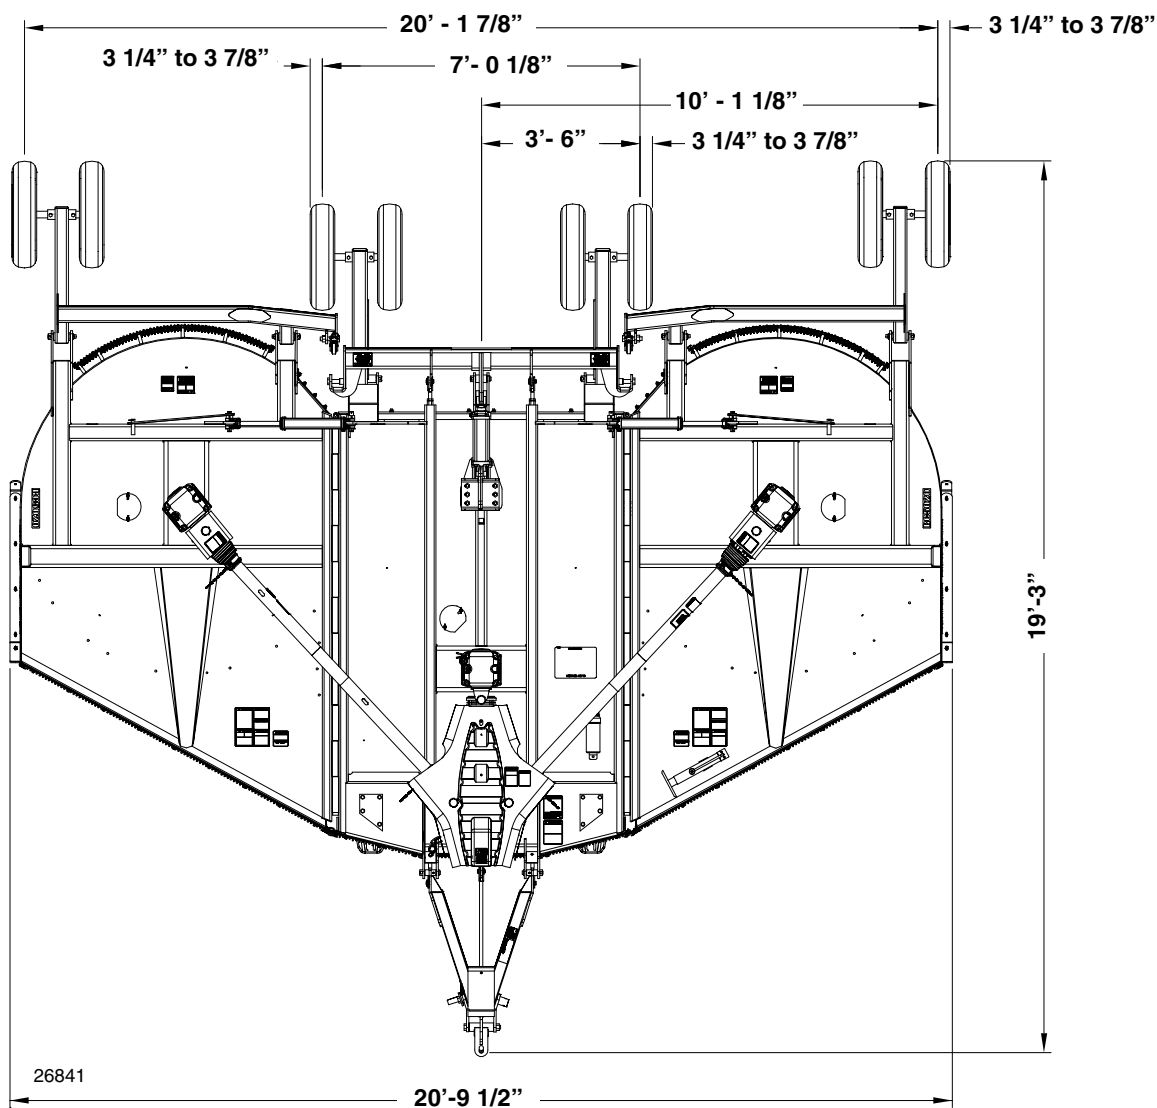

At 2" Cutting Height

Designs, specifications, features and information are subject to change without notice.