


Rotary Cutters Folding Deck
RC(M)5515 & RC(M)6515 Models


	RC5515 & RCM5515	RC6515 & RCM6515
Min. PTO Horse Power	50	
Gearbox Horsepower	250 HP Splitter 210 HP Center & Wing	250 HP Splitter 210 HP Center & Wing (Blade spindle gearboxes are built heavier)
Gearbox Oil Capacity	5.5 Pints: Divider Gearbox 10 Pints: Center deck, LH deck & RH deck spindle gearboxes	
Gearbox Lubrication	Gear Lube 80-90W EP	
Cutting Capacity	4"	4 1/2"
Hitch Weight	1,860 lbs.	
Machine Weight	Single row chain guards, 6 Airplane tires, 540 CV main driveline & standard clevis hitch	
	5,529 lbs. Approx.	5,559 lbs. Approx.
Blade Tip Speed At 540 RPM	Center Blades = 14,886 FPM	Wing Blades = 14,769 FPM
At 1000 RPM	Center Blades = 15,604 FPM	Wing Blades = 15,741 FPM
Hitch Types	Pull Type, Self - Leveling Hitch & Clevis Clevis Type: Standard, Up & Down Swivel	
Hitch Jack	Standard	
Cutting Width	15'-0"	
Overall Width	15'-8 1/2"	
Minimum Transport Width	7'-8" With wing axles disconnected at the turn buckles and wheels folded back.	
Overall Length	16'-5"	
Deck Height	12"	
Cutting Height	2" to 14"	
Lift Hydraulics	3 1/2" x 8" hydraulic cylinder, hoses, fittings & stroke control spacers	
Wing Hydraulics	3" x 12" hydraulic cylinders, hoses & fittings	
Wing Transport Protection	Wing Transport Locks	
Deck Material	10 gauge Top Deck and 7 gauge Bottom Deck	
Side Skirt Material	Bolt-on replaceable 1/4" side	
Skid Shoes	Wing: Reversible & replaceable Center Deck: 2 with optional mounting location on center deck	
Blades - 6 (2 per Carrier)	1/2" x 4" Heat Treated Free Swinging Alloy Steel with up lift	
Blade Overlap	6"	
Blade Bolt	Keyed with hardened flat washer & lock nut	
Stump Jumper / Blade Holder	3/16" Round dish shaped pan, reinforced with 1" x 5" x 22 3/4" blade bar	
Deck Ring	Optional 1/2" x 3" fully welded	
Front & Rear Guards	Optional rubber, single chain or double chain	
Input Driveline	ASAE Category 5 Star Profile with constant velocity u-joint or conventional (non-cv) u-joint.	
Intermediate Driveline	ASAE Category 5 star profile with slip-clutch	
Wing Drivelines	ASAE Category 4 star profile with slip-clutch or optional Cat. 5 W/slip clutch	ASAE Category 5 star profile with slip-clutch
Wheel Options	6" x 21" Laminated Tires or 25.5" x 8"-14" 20 ply Recap Aircraft tires with or without foam filling or 24" x 7.7"-10" 12-20 ply Recap Aircraft Tires with or without foam filling	
Number of Wheels	6 - Wheel option: 4 on transport axle and one on each wing axle 8 - Wheel option: 4 on transport axle and two on each wing axle	
Transport Axle	Spring-cushioned on center transport axle optional Walking tandem	
Hubs	Cast iron five-bolt hubs with tapered roller bearings and 1 3/4" shafts	
Colors	Standard color: Beige; Optional colors: Green or Red	

Designs, specifications, features and information are subject to change without notice.

Rotary Cutters Folding Deck - RC(M)5515 & RC(M)6515

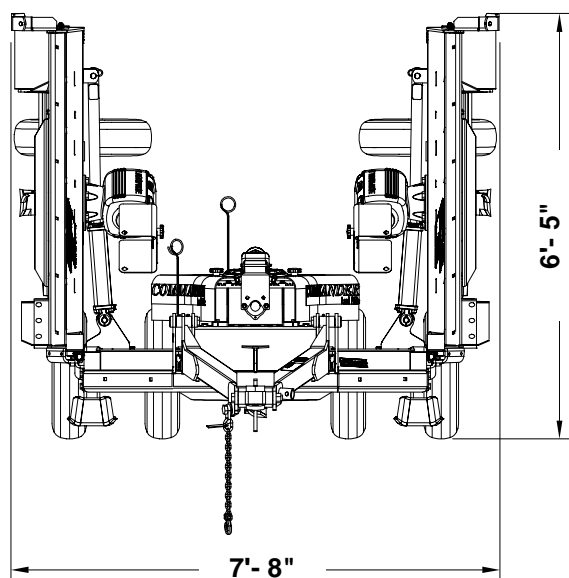


**Transport Width With Wing Axles
Disconnected At The Turnbuckles And Wheels
Folded Back. Cylinders Are Fully Retracted.**

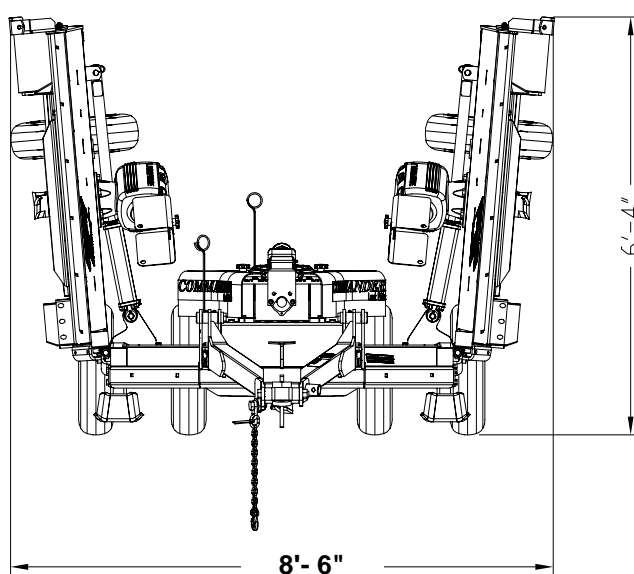

**Transport Width
Without Special Adjustments.
Cylinders Are Fully Retracted**

26985

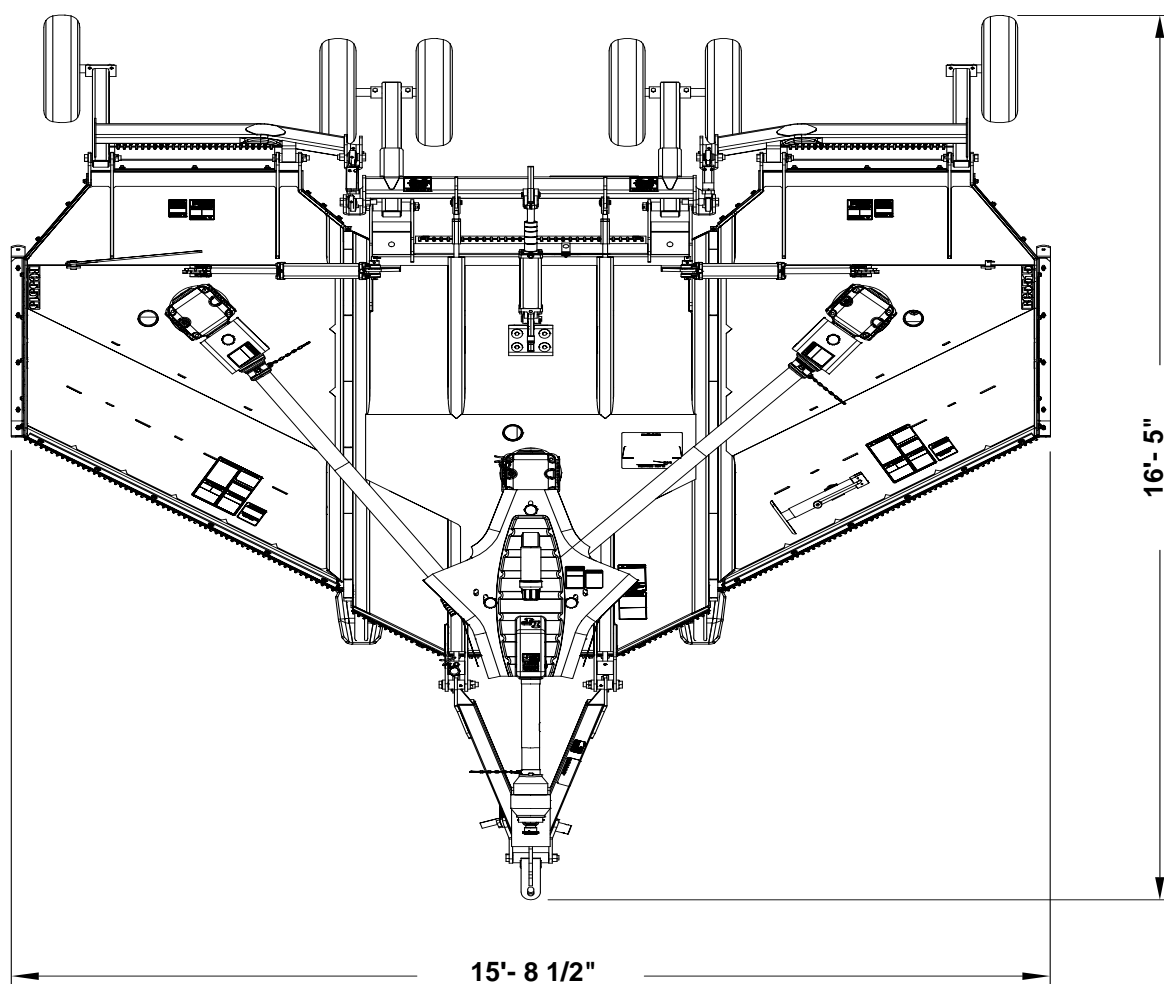

Designs, specifications, features and information are subject to change without notice.

26847