

Rotary Cutters Single Deck



RCF3096 & RCF(M)3010 Models

	RCF3096 (540 RPM)	RCF3010 (540 RPM) RCFM3010 (1000 RPM)
Machine Weight With Front & Rear With Rubber Guards. Also Includes Hydraulic Cylinder & 21" Wheels With Semi-Mount & Pull Type Units	3-Point Mount W/ 15" Wheels = 1,587 lbs. Semi-Mount = 1,800 lbs. Pull-Type = 1,976 lbs.	3-Point Mount = 2,004 lbs. Semi-Mount = 2,042 lbs. Pull-Type = 2,214 lbs.
Hitch	3-Point & Semi-Mount Category 1 & 2 Quick Hitch Adaptable Pull-Type - With Dual Self Level Rods	3-Point & Semi-Mount Category 2 & 3 Quick Hitch Adaptable Pull-Type - With Dual Self Level Rods
Parking Jack	Parking Jack on Tongue of Pull Type Cutter	
Cutting Width	8' - 0"	10' - 0"
Overall Width	8' - 7"	10' - 6 1/2"
Overall Length	3-Point Mounted Semi-Mounted Pull-Type	10' - 2" 10' - 2" 13' - 1"
Deck Height	11 1/4"	11 1/2"
Cutting Height	2" - 12"	
Cutting Capacity	2 1/2"	
Tractor H.P. Rating (PTO)	Lift-Type - 50 - 110 Pull/Semi - 40 - 110	Lift-Type - 60 - 110 Pull/Semi - 50 - 110
Gearbox Rating H.P.	T-Box - 160 HP, Outboard 110 HP	
Gearbox	540 rpm PTO Driven Gearbox Cast Iron Housing, Beveled Gears	540 rpm or 1000 rpm PTO Driven Gearbox Cast Iron Housing, Beveled Gears
Gearbox Input/ Output Shaft Size	Input Shaft = 1 3/4" - 20 Spline Output Shaft = 2" Dia.	
Gearbox Lubrication	80-90W EP Gear Lube	
Gearbox Oil Capacity	Comer = 6 Pints Comer = 4.5 Pints	
Deck Material Thickness	10 gauge	
Deck Side Skirt Thickness	1/4"	
Skids	Replaceable	
Stump Jumper	2 ea. - 3/16" Round Pan	
Blades (4)	1/2" x 4" Heat Treated Free-Swinging Suction Blades	
Blade Bolts	Keyed with Harden Flat Washer and Lock Nut	
Blade Tip Speed	540 RPM 16,360 fpm	540 RPM 17,100 fpm 1000 RPM 17,300 fpm
Driveline	3-Point & Semi-Mount Pull Type ASAE Cat 4 ASE Cat. 4 Equal Angle Shaft or Constant Velocity U-Joint	
Driveline Protection	540 rpm - 4 plate Slip Clutch Rubber Flex Coupler to Wing Boxes	540 rpm - 4 plate Slip Clutch 1000 rpm - 2 plate Slip Clutch Rubber Flex Coupler to Wing Boxes
Tailwheel Options	3-Point Without Rear Axle: 2 Tires 3-Point With Rear Axle: 2 Tires Semi-Mount: 2 Tires Pull-Type W/ Single Spindle: 2 Tires Pull-Type W/ Dual Spindles: 4 Tires	
Wheel Bearings	Tapered Roller Bearing in Cast Iron Hub	
Shock Absorption	Spring Shock Absorber on Axle of Semi-Mount & Pull Type	
Front Guard	Optional: Rubber deflector, Single Chain guard, or Double Chain Guard	
Rear Guard	Optional: Rubber deflector, Single Chain guard, or Double Chain Guard	



Designs, specifications, features and information are subject to change without notice.

Specifications & Capacities



Rotary Cutters Single Deck

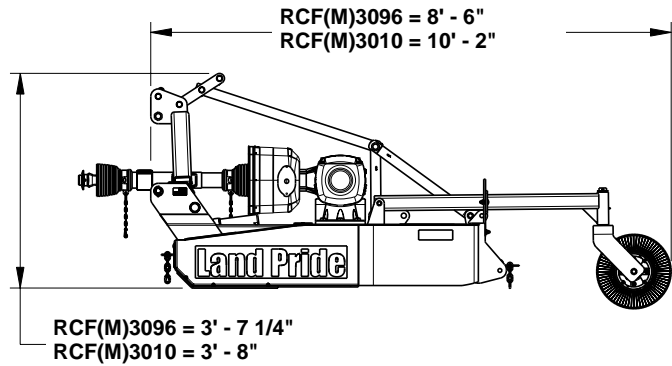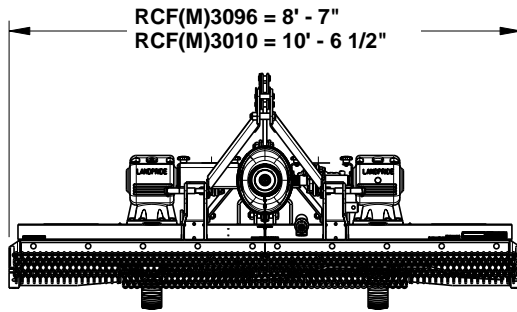

3-Point Mounted Rotary Cutter (RCF3096 Shown)

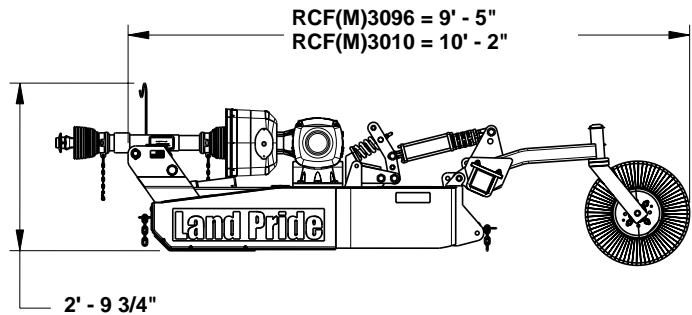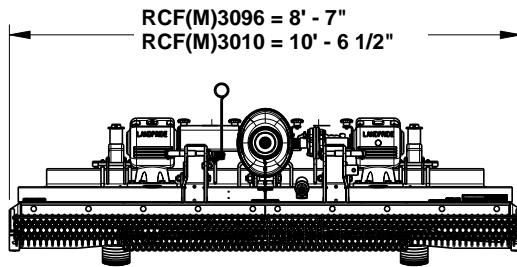

Semi-Mounted Rotary Cutter (RCF3096 Shown)

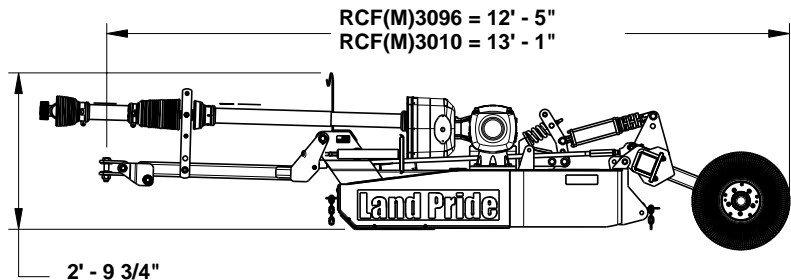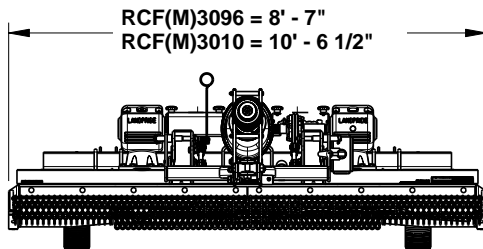

Pull-Type Rotary Cutter (RCF3096 Shown)

Designs, specifications, features and information are subject to change without notice.