


Rotary Cutters Single Deck

| RCR2596 (540 RPM) Machine Weight (With Front and Rear Chain Shields) Hitch Lift-Type 1,380 lbs. Pull-type 1,665 lbs. Lift-Type Category 1 & 2 Quick hitch adaptable Pull-Type - w/Dual Level Rods Cutting Width | RCR2510 (540 RPM) RCRM2510 (1000 RPM) Lift-Type 1,750 lbs Pull-Type 2,035 lbs. Lift-Type Category 2 & 3 Quick-Hitch adaptable Pull-Type - w/Dual Level Rods 118" | |
|--|---|--|
| Rear Chain Shields) Pull-type 1,665 lbs. Hitch Lift-Type Category 1 & 2 Quick hitch adaptable Pull-Type - w/Dual Level Rods | Pull-Type 2,035 lbs. Lift-Type Category 2 & 3 Quick-Hitch adaptable Pull-Type - w/Dual Level Rods 118" | |
| Quick hitch adaptable Pull-Type - w/Dual Level Rods | Quick-Hitch adaptable Pull-Type - w/Dual Level Rods 118" | |
| Cutting Width 94" | | |
| | | |
| Overall Width 99 3/4" | 123 1/2" | |
| Overall Length Lift-Type: 106" Pull-Type: 140 3/4" | Lift-Type: 112" Pull-Type: 150" | |
| Deck Height | 9 5/8" | |
| Cutting Height | 2" - 12" | |
| Cutting Capacity 1 1/2" | 1" | |
| Tractor H.P. Rating (PTO) Lift-Type: 50 - 110 Pull-Type: 40 - 110 | Lift-Type: 60 - 110 Pull-Type: 50 - 110 | |
| PTO Speed | | |
| Gearbox Rating H.P. Center - 100 | Center - 100 HP Outboard 60 HP | |
| | 540 rpm or 1000 rpm PTO Driven Gearbox Cast Iron Housing, Beveled Gears | |
| Gearbox Lubrication 80 | 80-90W EP | |
| Gearbox Oil Capacity End Boxes T-Box 2.5 Pints 4.5 Pints | 2.5 Pints 4.5 Pints | |
| · · · · · · · · · · · · · · · · · · · | Input Shaft = 1 3/4" - 20 Spline Output Shaft = 2" Dia. | |
| Deck Material Thickness | 0 gauge | |
| Deck Side Skirt Thickness | | |
| Skids Re | placeable | |
| Stump Jumper Roun | nd Pan 3/16" | |
| | 1/2" x 4" Heat Treated Free-Swinging Suction Blades | |
| Blade Bolts Keyed with Harden | Keyed with Harden Flat Washer and Lock Nut | |
| Blade Tip Speed 540 RPM 14,592 fpm | 540 RPM 17,749 fpm 1000 RPM 18,035 fpm | |
| Driveline Cat 4, w/Equal Angle U-Joint | Cat 4 w/Equal Angle U-Joint or Constant Velocity U-Joint | |
| · | 540 rpm - 4 plate slip clutch 1000 rpm - 2 plate slip clutch | |
| | Lift-Type: 2 ea. 4" x 8" x 15 1/4" Laminated Pull-Type: 2 ea. 6" x 9" x 21" Laminated or 24" Aircraft tires or 15" Automotive Rims | |
| | ain/ Front & Rear Rubber | |



Rotary Cutters Single Deck

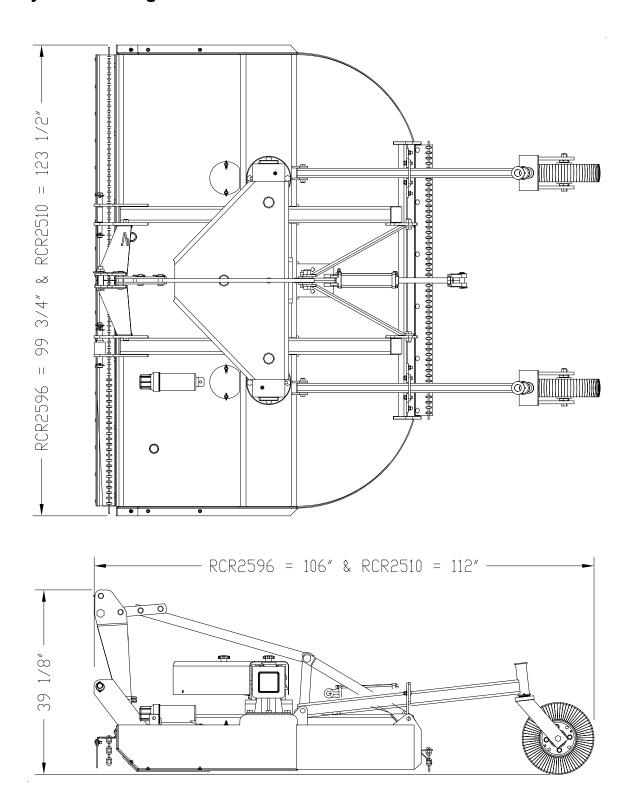


26815


3-Point Type RCR25 Series

Designs, specifications, features and information are subject to change without notice.



Rotary Cutters Single Deck

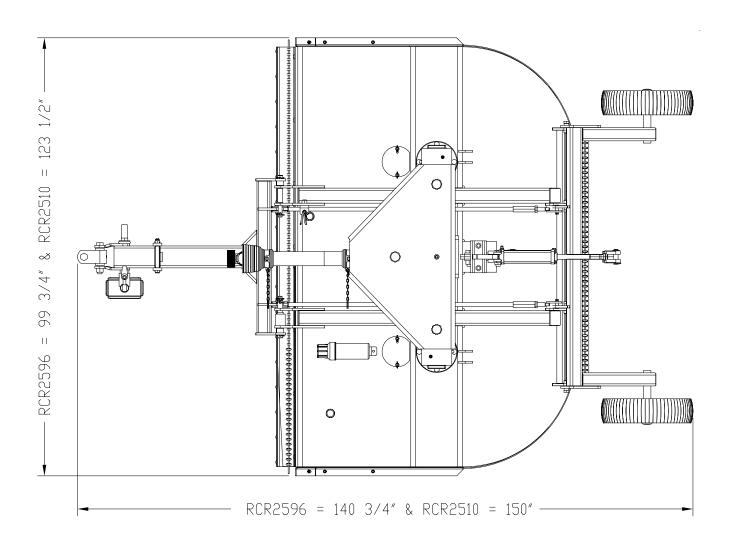

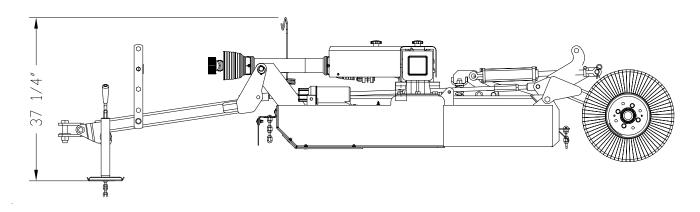

26816

Pull Type RCR25 Series

Designs, specifications, features and information are subject to change without notice.