
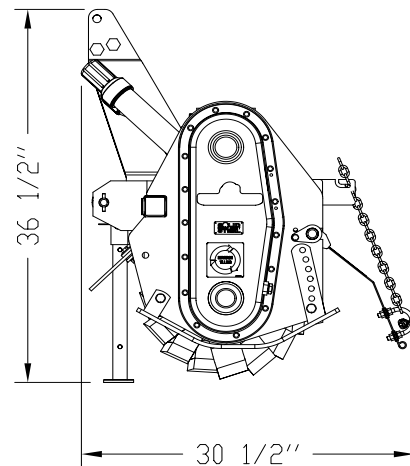


## Rotary Tillers

| RTR10 Series                       |   |                                     |                                     |
|------------------------------------|---|-------------------------------------|-------------------------------------|
| Model                              | RTR1042   | RTR1050                             | RTR1058                             |
| Recommended Tractor PTO HP         | 17 to 25 Horsepower (25 hp maximum)   |                                     |                                     |
| Weight                             | 403 lbs.  | 430 lbs.                            | 474 lbs.                            |
| Tilling Width                      | 42"   | 50"                                 | 58"                                 |
| Overall Width                      | 47 5/16"  | 55 5/16"                            | 63 5/16"                            |
| 3-Point Hitch Type                 | Category I, Adjustable Lower Hitch Clevis with Plated Pins<br>Fits Land Pride Quick-Hitch |                                     |                                     |
| Offset Capabilities                | Yes, Cannot offset with Quick-Hitch   |                                     |                                     |
| Sideshift Dimensions               | Centered<br>Shifted Right<br>Shifted Left   | 16" - 26"<br>13" - 29"<br>23" - 19" | 25" - 25"<br>18" - 32"<br>32" - 18" |
| Number of Tines per Flange         | 4   |                                     |                                     |
| Tine Construction                  | Alloy steel heat treated "C" shaped blades  |                                     |                                     |
| Skid Shoes                         | Adjustable  |                                     |                                     |
| Storage Stands                     | Adjustable  |                                     |                                     |
| Rear Deflector                     | Adjustable profile stamped rear deflector   |                                     |                                     |
| Front Deflector                    | Rubber  |                                     |                                     |
| Driveline                          | Category II<br>Off-Center Shear bolt - standard<br>Slip Clutch - optional                 |                                     |                                     |
| Gearbox                            | 25 HP input at 540rpm 1.92:1 ratio<br>Cast iron housing, straight bevel gears             |                                     |                                     |
| Gearbox Lubrication & Oil Capacity | 2 Pints of SAE 80-90W EP oil  |                                     |                                     |
| Drive Chain                        | #80 Roller chain - Fully enclosed in oil bath with drain & fill plugs                     |                                     |                                     |
| Drive Chain Lubrication            | Shell Alvania EP 00 or equivalent   |                                     |                                     |
| Sprockets                          | Case hardened teeth, splined bores  |                                     |                                     |
| Rotor Swing Diameter               | 15"   |                                     |                                     |
| Rotor Shaft Speed                  | 225 rpm at 540 rpm PTO  |                                     |                                     |

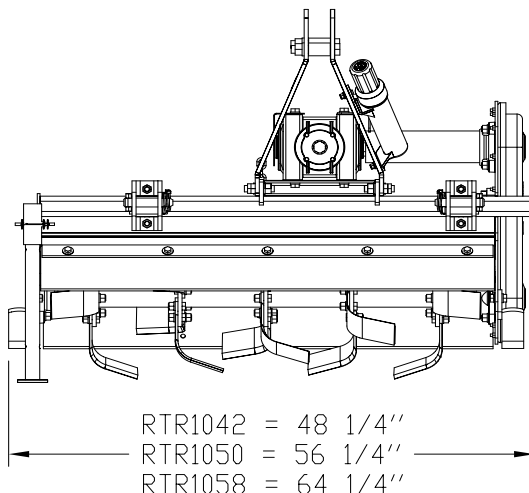


26796

Designs, specifications, features and information are subject to change without notice.

## Rotary Tillers

| RTR15 Series                       |   |                                     |                                     |                                     |
|------------------------------------|---|-------------------------------------|-------------------------------------|-------------------------------------|
| Model                              | RTR1550   | RTR1558                             | RTR1566                             | RTR1574                             |
| Recommended Tractor PTO HP         | 17-35 HP  |                                     | 20-40 HP                            | 25-50 HP                            |
| Weight                             | 455 lbs.  | 489 lbs.                            | 523 lbs.                            | 557 lbs.                            |
| Tilling Width                      | 50"   | 58"                                 | 66"                                 | 74"                                 |
| Overall Width                      | 56 1/4"   | 64 1/4"                             | 72 1/4"                             | 80 1/4"                             |
| 3-Point Hitch Type                 | Category I, Adjustable Lower Hitch Clevis with Plated Pins<br>Fits Land Pride Quick Hitch |                                     |                                     |                                     |
| Sideshift Capabilities             | Yes, (Note: Sideshift capability is limited to adjustment of lower left clevis hitch)     |                                     |                                     |                                     |
| Sideshift Dimensions               | Centered<br>Shifted Right<br>Shifted Left   | 25" - 25"<br>12" - 38"<br>31" - 19" | 29" - 29"<br>12" - 46"<br>35" - 23" | 33" - 33"<br>12" - 54"<br>39" - 27" |
| Number of Flanges                  | 6   | 7                                   | 8                                   | 9                                   |
| Number of Tines per Flange         | 4   |                                     |                                     |                                     |
| Tine Construction                  | Alloy steel heat treated "C" shaped blades  |                                     |                                     |                                     |
| Skid Shoes                         | Adjustable  |                                     |                                     |                                     |
| Storage Stands                     | Adjustable  |                                     |                                     |                                     |
| Rear Deflector                     | Adjustable profile stamped rear deflector   |                                     |                                     |                                     |
| Front Deflector                    | Rubber  |                                     |                                     |                                     |
| Driveline                          | Category III Heavy Duty<br>Off-Center Shear bolt - standard<br>Slip Clutch - optional     |                                     |                                     |                                     |
| Gearbox                            | 50 HP input at 540 rpm 1.92:1 ratio<br>Cast iron housing, straight bevel gears            |                                     |                                     |                                     |
| Gearbox Lubrication & Oil Capacity | 2 Pints of SAE 80-90W EP oil  |                                     |                                     |                                     |
| Drive Chain                        | #80 Roller chain - Fully enclosed in oil bath with drain & fill plugs                     |                                     |                                     |                                     |
| Drive Chain Lubrication            | Shell Alvania EP 00 or equivalent   |                                     |                                     |                                     |
| Sprockets                          | Case hardened teeth, splined bores  |                                     |                                     |                                     |
| Rotor Swing Diameter               | 15"   |                                     |                                     |                                     |
| Rotor Shaft Speed                  | 211 rpm at 540 rpm PTO  |                                     |                                     |                                     |

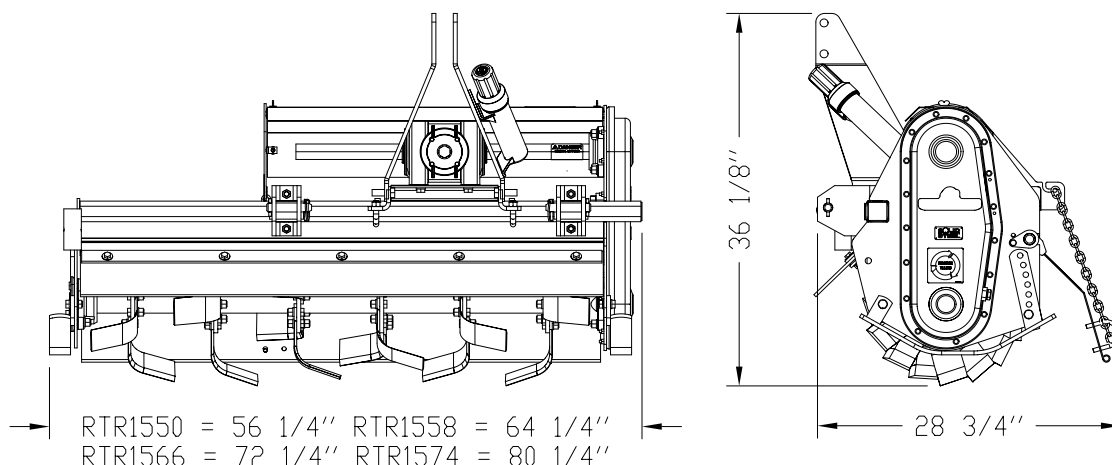

26798

Designs, specifications, features and information are subject to change without notice.