
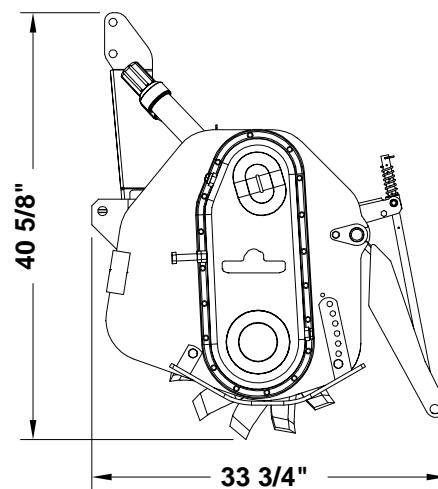


## Rotary Tillers

RTR20 Series		
	RTR2064	RTR2072
Recommended Tractor PTO HP	23-50 Horsepower (50 hp maximum)	
Weight	748 lbs.	795 lbs.
Tilling Width	64"	72"
Overall Width	70 13/16"	77 7/8"
3-Point Hitch Type	Category I, Adjustable Lower Hitch Clevis with Plated Pins Fits Land Pride Quick-Hitch	
Sideshift Capabilities	14"	18"
	Note: Limited sideshift capabilities with Land Pride Quick-Hitch	
Number of Flanges	8	9
Number of Tines per Flange	6	
Tine Construction	Alloy steel heat treated "C" shaped blades	
Skid Shoes	Adjustable	
Storage Stands	Adjustable	
Rear Deflector	Adjustable profile stamped rear deflector	
Driveline	ASAE Category III Heavy Duty Off-Center Shear bolt - standard Slip Clutch - optional	
Gearbox	50 HP Input at 540 rpm 1.46:1 Ratio Cast Iron Housing, Straight Bevel Gears	
Gearbox Lubrication Capacity & Type	2.2 Pints of SAE80-90W EP oil	
Drive Chain	#80 Roller chain - Fully enclosed in oil bath with drain & fill plugs	
Drive chain lubricant	Shell Alvania EP 00 or equivalent	
Sprockets	Splined Bores	
Rotor Swing Diameter	17"	
Rotor Shaft Speed	220 rpm at 540 rpm PTO	

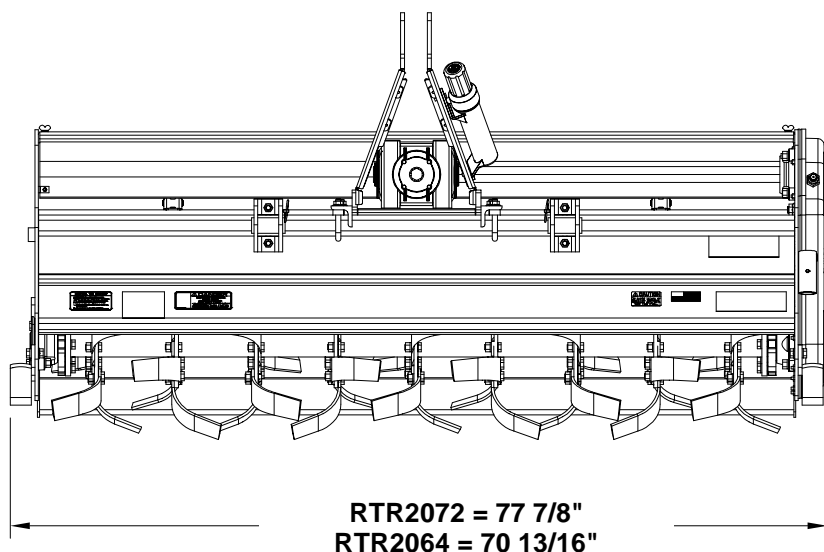

26799

Designs, specifications, features and information are subject to change without notice.